

NEW CREATION WORKS LTD.

FOKUZ INSTALLATION INSTRUCTIONS

FOKUZ 2

⚠ Please read these instructions carefully before installation



🔧 This instruction has 3 major parts

1. Important Safety Notes
2. Fixture Assembly
3. Lamp Assembly

For servicing in Singapore contact:


CTA CONTROL TECH ASIA PTE. LTD.
Lighting & Control for Architectural & Theatrical Spaces
45 Genting Lane #03-02, Genting Complex, Singapore 349557
Tel: +65-67420181 Fax: +65-67491681
Email: info@controltechasia.com
Website: www.controltechasia.com
Company No.: 200802342R

1. Important Safety Notes


- This is a recessed fixture and should be installed to a non-flammable surface by a certified technician only.
- This product is IP20 rated and should only be used indoors.
- Before installation, make sure the power rating is compatible to the product label, otherwise, the product may be damaged or experience electric shock and cause fire.
- Do not disassemble the fixture or perform repair. FOKUZ will not be responsible for any damage or accidents due to unauthorized repair.
- This sign  means that any object being lit must have a minimum distance of the specified requirement.
- This fixture must be properly grounded.
- During re-lamping, power must be disconnected to the fixture.
- The lamp can be extremely hot during operation and should be cooled down before making contact.
- When re-lamping, make sure the replacement bulb is compatible to the specifications of the product.
- This sign  means that the product must use self-shielded lamps only.
- Before installation, the ceiling should have an opening 200+5/-0mm.
- Do not cover the fixture with any object to prevent damage or cause of fire accident.

2. Fixture Assembly


- Make sure the power is compatible to the product label.
- Make sure the power to the cables is not live and disconnected from the power source.
- Make sure the cables are correctly connected to the designated output.(Dia. 1)

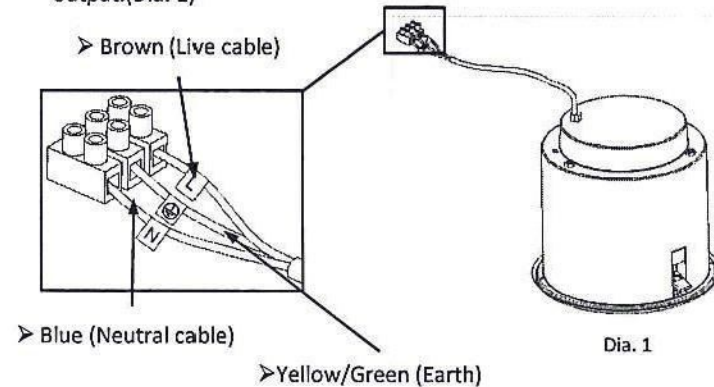

- Before installation, the ceiling should have an opening 200 + 5.0/-0 mm. Please refer to Dia. 2 and loosen the screws in anti-clockwise direction. As the screw is being loosened, the flap will extended out and move upwards.
- Ceiling with round opening

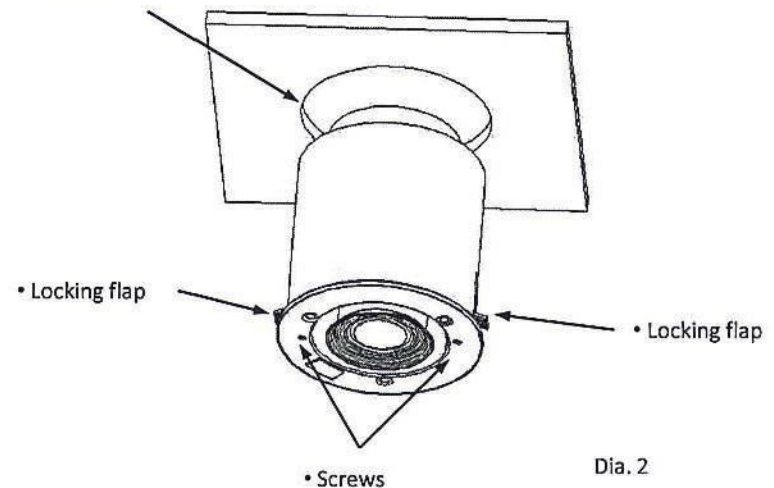


- Please refer to Dia. 3. As the screw is being tightened (clockwise), the flap will extend and down until it locks the fixture to the ceiling.
- Note that the ceiling must not be thicker than 25mm.

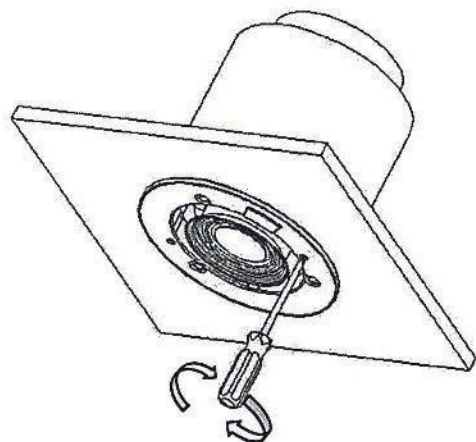

Clockwise

Dia. 3

- When assembling the bezel to the fixture, make sure the rectangular opening on the bezel matches to the LCD window. Must make sure the 4 locking clip are clicked into position. Refer to Dia.4 and Dia. 5.

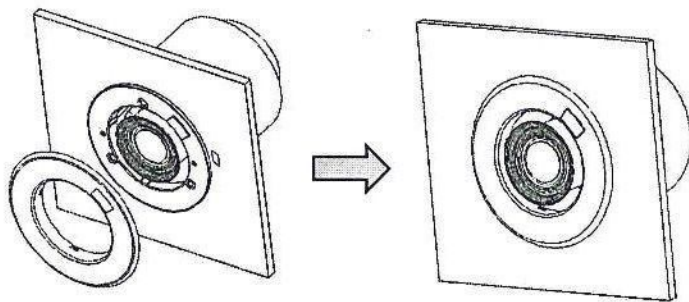


Dia.4

Dia. 5

3. Lamp Assembly

Using 7W LED lamps:

- When re-lamping, use the FOKUZ controller to extend the lamp holder assembly down from the ceiling. Refer to Dia. 6. Turn counter clockwise to loosen the lamp.
- This lamp uses GU10 lamp holder and the lamp should be twisted into position.

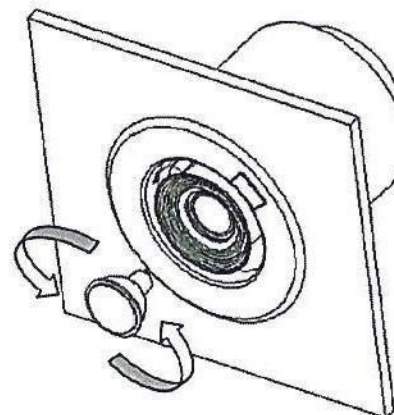

Dia. 6