

BZ402 Multifunctional Control Module Base



Product Introduction:



Bridges' intelligent BZ402 multifunctional control module is a configurable 4 channel system that allows for any combination of relay and dimming outputs. The BZ402 can be installed with 1-4 dimming (BZ102D) or relay (BZ102R) Modules allowing you to deliver a compact design without installing unnecessary features and modules. Each base can also be configured with a Real time clock or external control interface card to suit your requirements.

It can be conveniently formed into a system with other modules of BZ400 family. BZ402 features DIN rail installation design which is small, simple and compact.

Technical parameters:

- Supply: single phase, 220V AC phase, 50HZ (maximal lead cross section: 2.5mm²)
- Maximum load: 10A;
- RS485 communication
- DIP switch with network selection button
- Maximum 4 output channels;
- Each output channel equipped with a fuse (3.15A Slow Blow);
- 96 preset scenes;
- LED Indicator: Module Status
- Din Rail Mounting
- DLNet Bus Powered
- Working environment: maximum temperature 55°C; maximum humidity at 95%.
- Dimensions: 110 x 93 x 74.5mm (LWH)
- Weight: 500 Grams


Dimensional Drawing:



BZ402 Multifunctional Control Module Base



BZ402 Wiring Diagram:

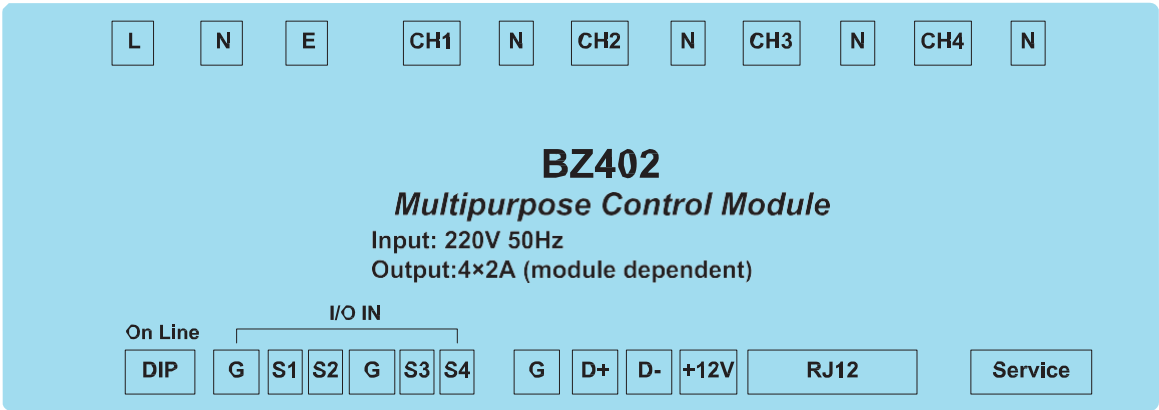

Matched Accessories :



BZ102D
Dimming control card



BZ102R
Relay control card



BZ-T
Clock timer input card



BZ-I
Dry contact input card
(for connecting with a third- party panel)