

BZ402C Trailing Edge Dimming Control Module




Product Introduction:

Dalitek intelligent BZ110D is a 4 channel trailing edge dimming module with a maximum load of 2A per channel. It is suitable for use with incandescent lamps, low-voltage halogen lamps and cold cathode lamps. The module features 96 scene memory, 4 dry contact inputs compact for external control with 3rd party panels

Technical parameters :

- Supply: single phase, 220V AC phase, 50HZ (maximal lead cross section: 2.5mm²)
- Maximum load: 8A;
- RS485 communication
- DIP switch with network selection button
- Maximum 4 output channels;
- Each output channel equipped with a fuse (3.15A Slow Blow);
- 96 preset scenes;
- Din Rail Mounting
- LED Indicator: Module Status
- DLnet Bus Powered
- Working environment: maximum temperature 55°C; maximum humidity at 95%.
- Dimensions: 110 x 93 x 74.5mm (LWH)
- Weight: 500 Grams


Dimensional Drawing :

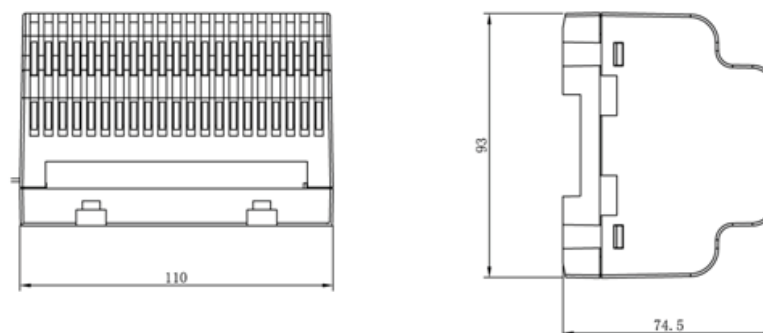


BZ402C Trailing Edge Dimming Control Module



BZ402C Wiring Diagram:

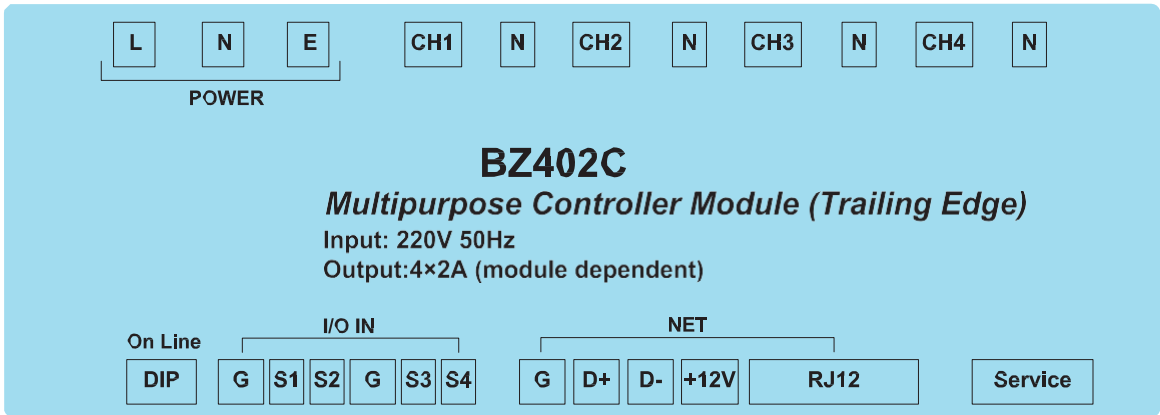

Matched Accessories:



BZ102C
Trailing edge phase control dimming card