

BZ405RE SPDT Relay Control Module




Product Introduction:

Bridges' intelligent BZ405RE is a 4 channel SPDT relay control module, with a maximum load per channel of 5A. It is ideal for controlling bi-directional motors such as electric projection screens and electric shutter motor. The BZ405RE has the option for integration of our Real Time Clock Module (BZ-T) or our external input control Module (BZ-I) delivering intelligent scene control.

Technical parameters:

- 4 channels at 5A/channel voltage-free, single-pole, double-throw relay: (maximum lead cross section: 2.5mm²)
- RS485 communication
- LED Indicator: Module Status
- Din Rail Mounting
- DLNet Bus Powered
- Working environment: maximum temperature 55°C; maximum humidity at 95%.
- Dimensions: 110 × 93 × 74.5mm (LWH)
- Weight: 500 Grams


Dimensional Drawing:

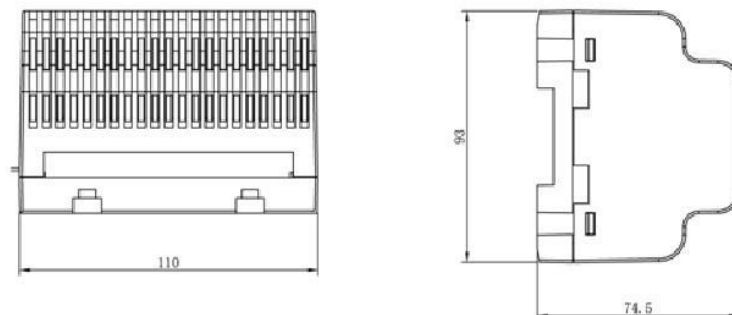

BZ405RE SPDT Relay Control Module



BZ405RE Wiring Diagram:

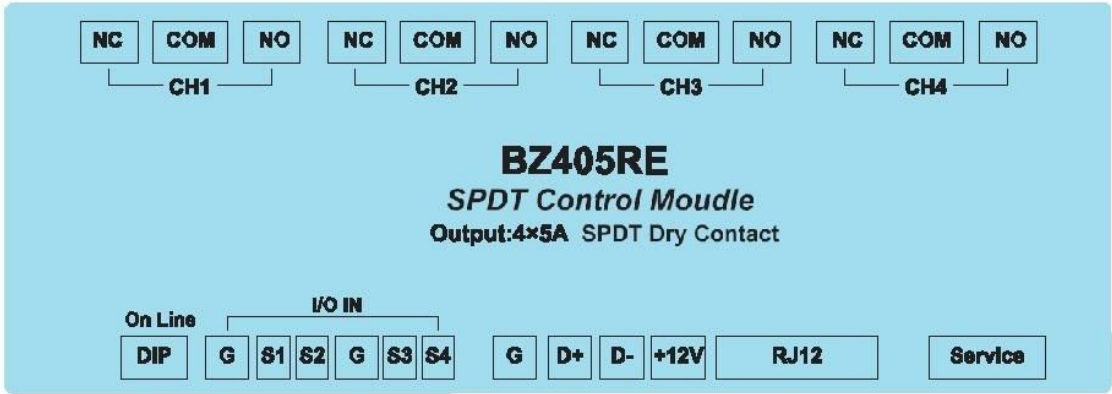

Family Accessories:



BZ-T
Clock input card



BZ-I
Dry contact input card
(for connecting with a
Technical parameters
third-party panel)