




Product Introduction:


BZ416 is a 4 channel relay control module, with a maximum load of 16A per channel. It is ideally suited to switching lighting loads. The BZ416 has the option for integration of our Real Time Clock Module (BZ-T) or our external input control Module (BZ-I) delivering intelligent scene control.

Technical parameters:

- 4-channel multi-inlet & multi-outlet control (maximum lead cross section: 2.5mm²);
- Maximum output of each channel: 16A;
- RS485 communication
- LED Indicator: Module Status
- Din Rail Mounting
- DLNet Bus Powered
- Working environment: maximum temperature 55°C; maximum humidity at 95%.
- Dimensions: 110 x 93 x 74.5mm (LWH)
- Weight: 500 Grams

Dimensional Drawing:






BZ416 Relay Control Module



BZ416 Wiring Diagram:

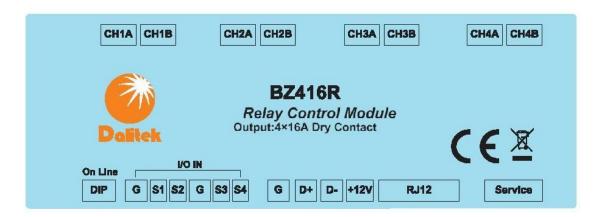

Family Accessories:



Clock input card



BZ-I Dry contact input card (for connecting with a Technical parameters third-party panel)