

Product Specifications

| | |
|--|--|
| Construction: | Metal lamp housing with powder coated finish, and aluminum alloy movement brackets |
| Color: | White, black, or color on request |
| Size: | Fixture : 225mm (D) ¹ x 213mm (H) Power supply unit : 250mm (L) x 84mm (W) x 45mm (H) |
| Voltage: | 120-220V AC, 50/60Hz (Specify required rate when ordering) |
| Remote control distance: | Min. 10 meters (Slight differences may occur. Depending on individual site conditions) |
| Lamp² & Wattage: | LED QR111, 18.5W Max., 12V G53 |
| Dimmable: | Internal dimming, 0-100%; Leading edge phase (External dimming available, specify dimming method when ordering) ³ |
| Movement: | <ul style="list-style-type: none"> • Pan movement: 360° • Tilt movement: +/- 35° |
| Mounting: | Recessed |
| Max. ceiling thickness: | 38mm |
| Min. ceiling clearance: | 240mm |
| Ceiling cutout: | Ø 220mm |
| Control options: | <ul style="list-style-type: none"> • Hand-held remote control • DMX (specify when ordering)⁴ • DALI (specify when ordering)⁴ • Wi-Fi (specify when ordering)⁴ |
| Accessories: | Honeycomb louvre (specify when ordering) |






Notes: ¹ Bezel is included for diameter measurement. Housing's diameter is 196mm only.

² Lamp is excluded but options are available to order separately.

³ Fixture cannot be dimmed internally when it is customized as external dimming. Exact dimming system must be specified when ordering and ask for quote.

⁴ DMX, DALI and Wi-Fi require additional setup charges. It must be specified when order. We will provide pre-installation guidelines.

⁵ Refer to separate section for photometric details.

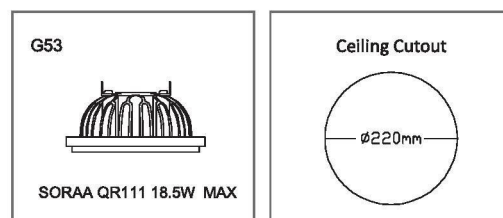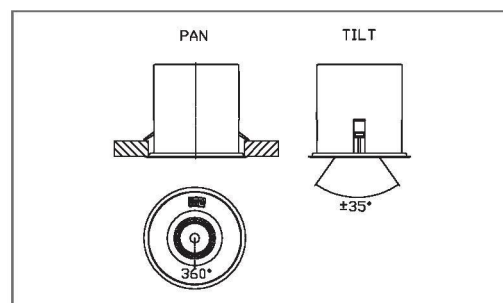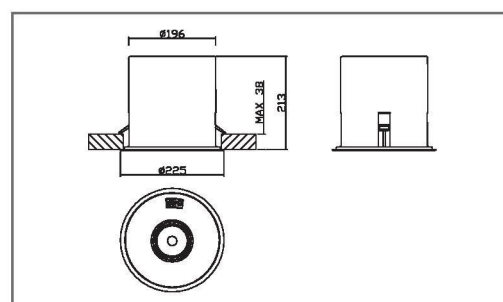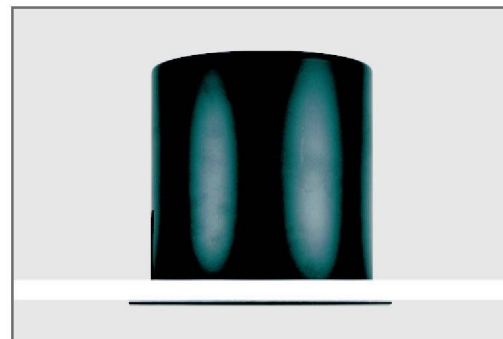

For further information contact:

CTA CONTROL TECH ASIA PTE. LTD.
Lighting & Control for Architectural & Theatrical Spaces
45 Genting Lane #03-02, Genting Complex, Singapore 349557
Tel: +65-67420181 Fax: +65-67491681
Email: info@controltechasia.com
Website: www.controltechasia.com
Company No.: 200802342R